
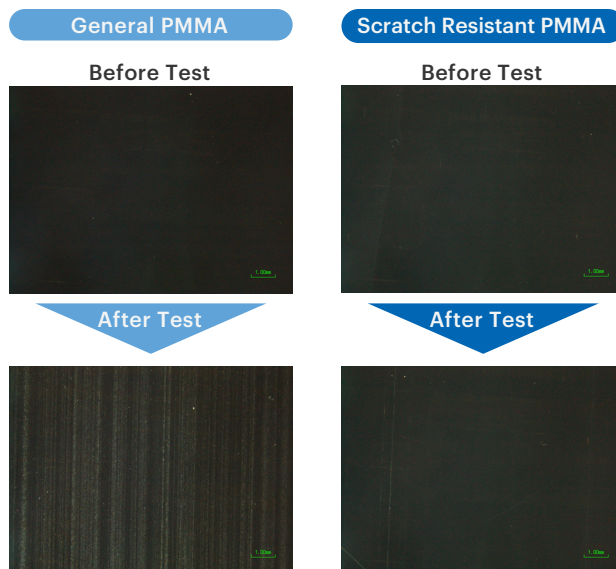


## Scratch Resistant PMMA KA100 & KA200

Scratch resistance with slippery surface

### 1.Effect

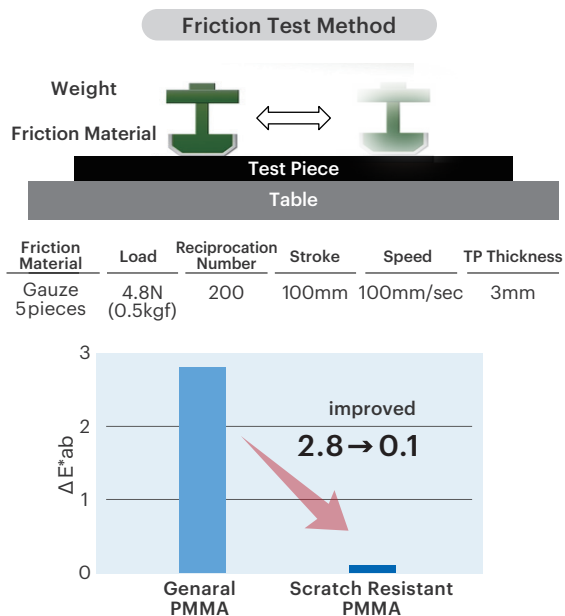

### 2.Products

| Item  | Color No. | Scratch Resistance | HDT(°C)<br>ISO 75-1,2 1.8Mpa | MFR (g/10min)<br>ISO 1133-1 230°C, 3.8kg |
|-------|-----------|--------------------|------------------------------|------------------------------------------|
| KA100 | PTN0070   | ○                  | 99                           | 1.9                                      |
| KA200 | PTN0070   | ○                  | 94                           | 6.0                                      |
| VH    | PTN0070   | ×                  | 100                          | 2.0                                      |

\*The shown values are measured values, not standard values.

- The content of this brochure may be changed without prior notice.
- The color tone may be different from the actual ones due to the characteristics of printing.
- The transcription of any data or information contained in this brochure without prior written content is strictly prohibited.

MMA/PMMA Division PMMA Resins Group ACRYPET

[https:// www.acrypet.com /](https://www.acrypet.com/)

